

# VPX3-ZU1B-SDR-DA

## 3U VPX SDR 2T2R Module Zynq Ultrascale+ MPSoC ADRV9029 RF Transceiver



### Specifications

- 3U OpenVPX module, Air-Cooled and Conduction Cooled version
- AMD Zynq Ultrascale+ MPSoC ZU6/ZU9/ZU15 FFVC900E package
- Up to 8GB PS DDR4-2400 memory 64-bit, 8-bit ECC
- Up to 2GB PL DDR4-2400 memory 16-bit, no ECC
- Up to 256GB eMMC managed NAND Flash
- FMC HPC site with 10x MGTs @ up to 16.3Gb/s
- ADRV9029 Wideband RF Transceiver
- Quad Transmitter (Tx), Quad Receiver (Rx)
- Ext\_Lo Input/Output
- External Reference Clock Input
- RF Coverage 75MHz to 6.0 GHz
- Tx Synthesis Bandwidth (BW) to 450MHz
- Rx Bandwidth: Up to 200MHz
- Support for TDD and FDD applications
- On-Board VCXO @ 122.88MHz.

### Description

PanaTeQ's VPX3-ZU1B-SDR-DA is a 3U OpenVPX modules based on the Zynq UltraScale+ MPSoC device from AMD coupled to RadioVerse Analog Devices RF Wideband Transceiver ADRV9029 for a broad range of applications such as Software Defined Radio, MIL-COM, massive MIMO, Phase Array Radar and Electronic Warfare.

PanaTeQ provides solutions for Ruggedized Air-Cooled and Conduction Cooled systems.


These VPX3-ZU1B-SDR-DA module is based on the following PanaTeQ's sub-modules (boards):

The VPX3-ZU1B is a 3U OpenVPX module based on a AMD Zynq Ultrascale+ MPSoC with a FMC 57.1 site, HW/SW compatible with ZCU102 Evaluation board from AMD.


The FMC-ZU3RF-A is a FMC based on an Analog Devices ADRV9029

### Typical Applications

- Software Defined Radio
- Wireless Infrastructure 3G/4G
- FDD and TDD active Antenna Systems
- Electronic Warfare
- Drones and UAVs
- Military Communications

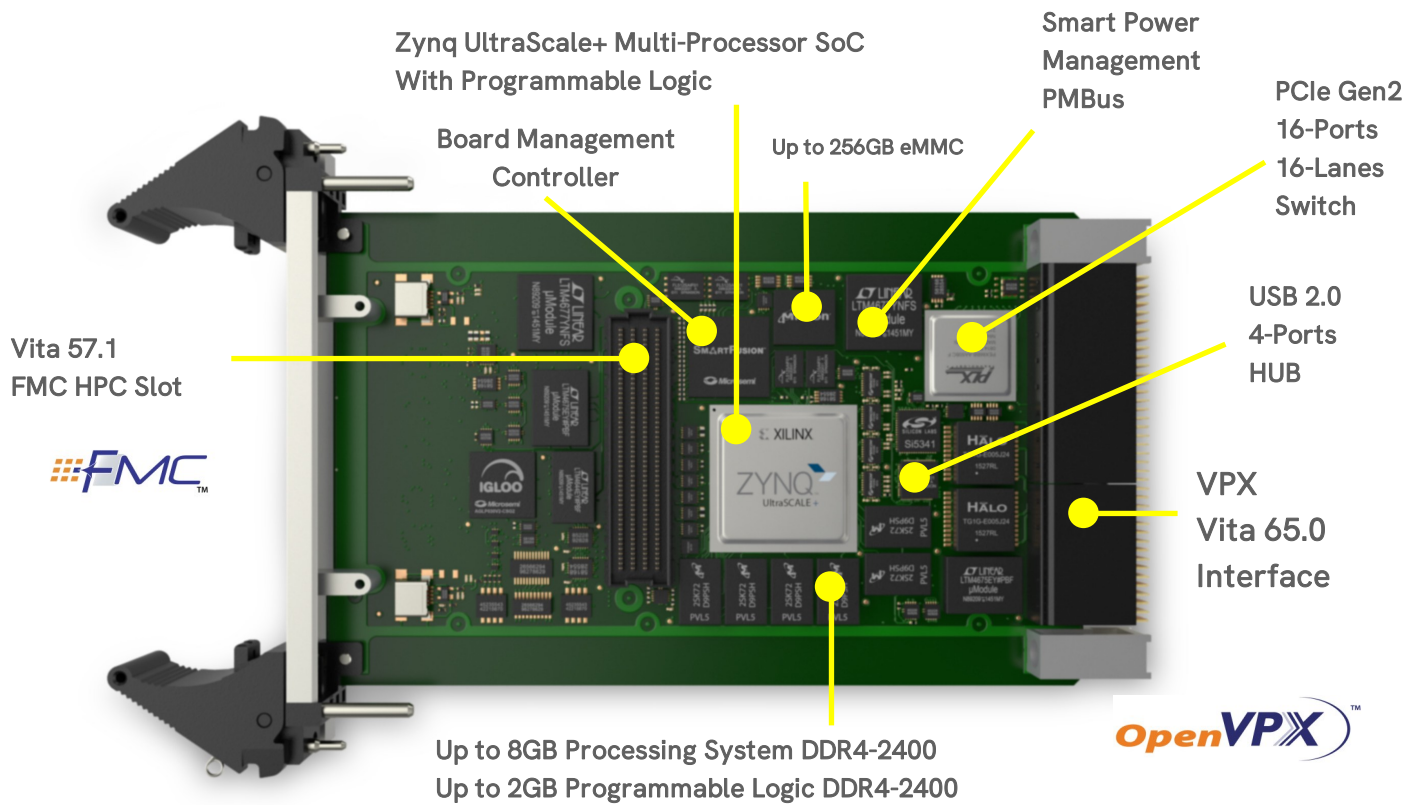

## Block Diagram

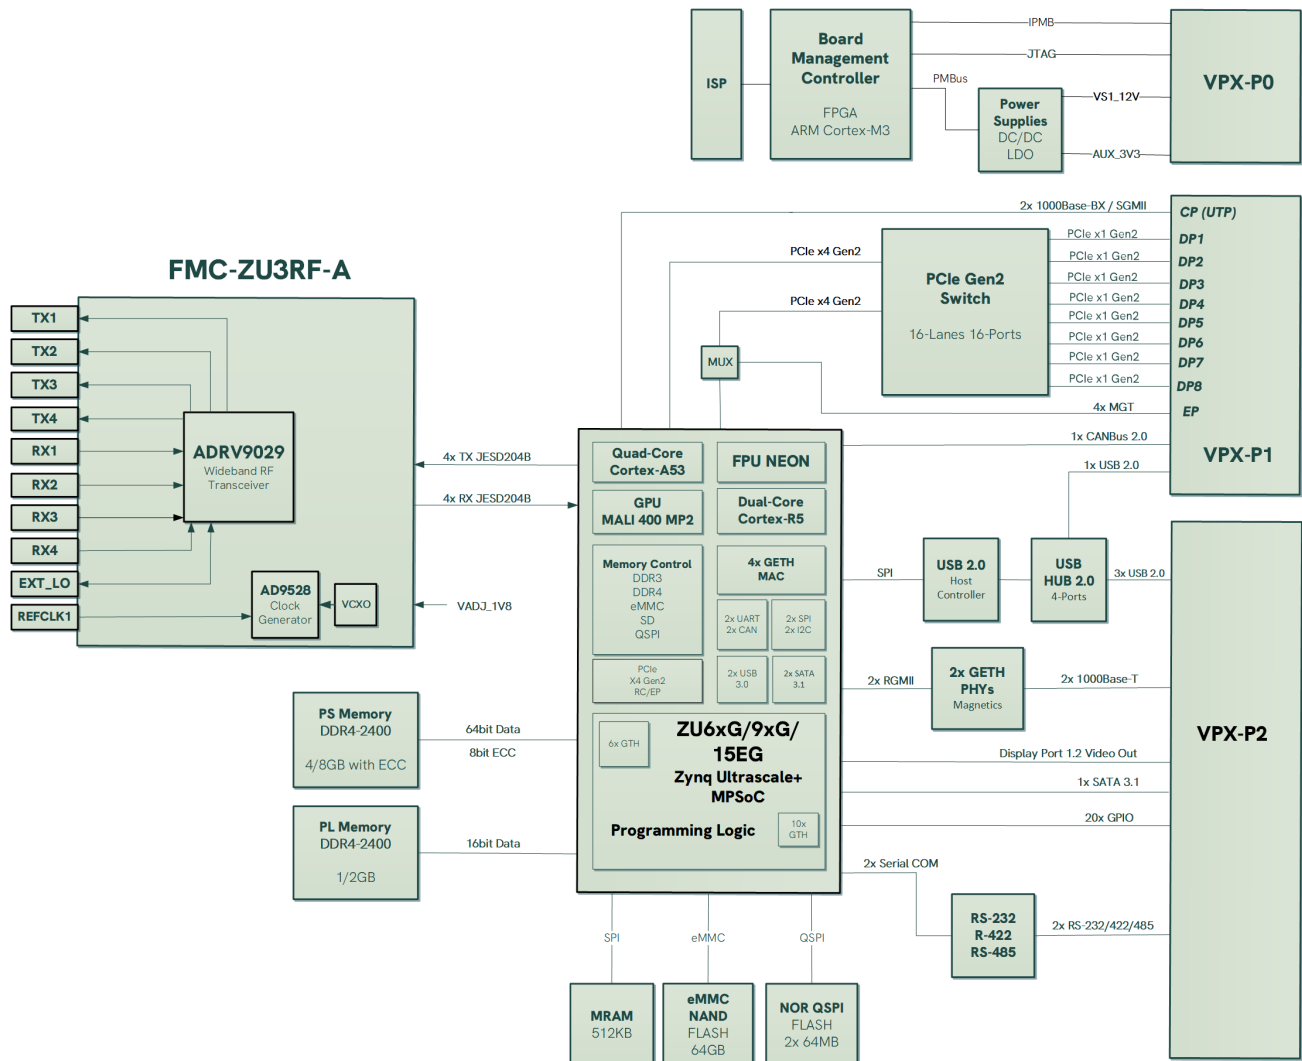

## Module Specifications

- 3U Compliant to VITA 46.0, 46.4, 46.6, 65.0, 57.1 standards
  - AMD Zynq UltraScale+ MPSoC
  - ZU6xG/ZU9xG/ZU15EG FFVC-900 Package
  - Up to 8GB DDR4-2400 64-bit PS memory with 8-bit ECC
  - Up to 2GB DDR4-2400 16-bit PL memory
  - 128MB QSPI NOR
  - Up to 256GB eMMC
  - 512KB MRAM
  - On-board PCIe Gen2 Switch 16-Lanes 16-Ports with NT support
  - 4x MGTs on VPX-P1 Expansion Plane
  - 1x Display Port 1.2 Video Out on VPX-P2
  - 2x ETH 1000Base-BX/SGMII on VPX-P1 Control Plane
  - 2x ETH 1000Base-T on VPX-P2
  - 4x USB 2.0, 1x SATA 3.1 on VPX-P2
  - 20x LVCMOS or 10x LVDS GPIO on VPX-P2
  - 2x RS-232/422/485, 1x CAN 2.0B on VPX-P2
  - FMC HPC site with 90x IO / 45x LVDS, 10x MGT
  - Smart Power Management using 4x LTM467x with PMBus
  - Board Management Controller ARM Cortex-M3 based
  - VPX System Controller
  - Air Cooled and Conduction Cooled
  - Optional Conformal Coating and KVPX Connectors
- 
- ADI ADRV9029 RFIC based.
  - VITA 57.1-2010 specification compliant
  - Conduction cooled compatible
  - Quad Transmitters (Tx)
  - Quad Receivers (Rx)
  - Ext\_Lo Input/Output
  - External Reference Clock Input
  - RF coverage 75MHz to 6.0GHz
  - Tx synthesis bandwidth (BW) to 450MHz
  - Rx BW: to 200MHz
  - Support for TDD and FDD applications
  - Fully integrated independent fractional-N radio frequency (RF) synthesizers
  - FMC High Pin Connector (HPC)
  - JESD024B/C interface up to 24.33 Gbps - 4 Tx - 4 Rx
  - Operates with VAdj = 1.8V to 1.5V
  - VAdj = 2.5V to 1.8V On-board VCXO : 122.88 MHz

## Product Codification

The **VPX3-ZU1B-SDR-DA** can be assembled with different versions of the Zynq Ultrascale+ MPSoC devices and various amounts of memory storage. The cooling technique et ruggedization level are also available options. The following table shows the product coding for all these options.

# VPX3-ZU1B-SDR-DA- B 1 M – AS

	Device	ARM A53 Cores	GPU	System Logic Cells	DSP Slices	Memory
A	XCZU6EG	4	Yes	469K	1973	25.1 Mb
B	XCZU9EG	4	Yes	600K	2530	32 Mb
C	XCZU15EG	4	Yes	747K	3528	57.7 Mb
D	XCZU6CG	2	No	469K	1973	25.1 Mb
E	XCZU9CG	2	No	600K	2530	32 Mb

	Device Speed Grade
1	Standard
2	Fast

	PS / PL Memory Size
M	4GB/1GB
P	8GB/2GB

	Ruggedization Level	VITA 47
AS	Air Standard	EAC4
AR	Air Rugged	EAC6
CC	Conduction Cooled	ECC3
CR	Conduction Rugged	ECC4

## Ordering Information

The following product references are offered by PanaTeq as standard products. Other combinations of devices, speed grade, memory and cooling can be specially ordered. Please contact us for details

Reference	Device	Temp Grade	Speed Grade	Memory PS/PL	Ruggedization Level
VPX3-ZU1B-SDR-DA-B1M-AS	ZU9EG-E	0 to +100C	-1	4GB/1GB	Air Standard EAC4
VPX3-ZU1B-SDR-DA-C1M-AS	ZU15EG-E	0 to +100C	-1	4GB/1GB	Air Standard EAC4
VPX3-ZU1B-SDR-DA-B1M-CC	ZU9EG-I	-40 to +100C	-1	4GB/1GB	Conduction Cooled ECC3
VPX3-ZU1B-SDR-DA-C1M-CC	ZU15EG-I	-40 to +100C	-1	4GB/1GB	Conduction Cooled ECC3